


Imperial [IP] Dimensions  
Metric (SI) In Parentheses

CARNES COMPANY, 448 S. Main St., P. O. Box 930040, Verona, WI. 53593-0040 Phone: 608/845-6411 Fax: 608/845-6470 E-Mail: carnes@carnes.com www.carnes.com

**Grille Model**  
**RSDB (Steel)**  
**RADB (Aluminum)**

**Register Model**  
**RTDB (Steel)**  
**RWDB, RNDB (Aluminum)**

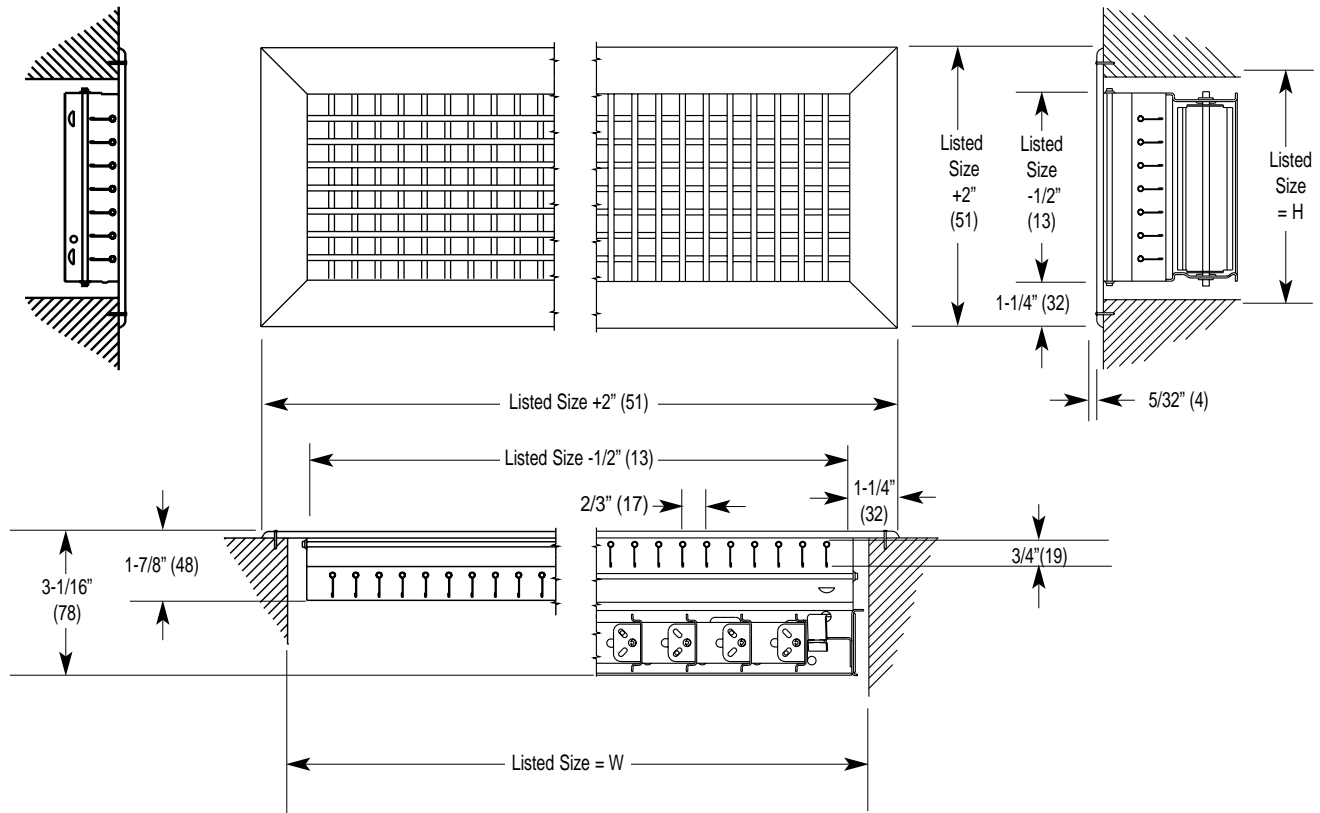

**Notes:**

- Standard screws are #6 x 1-1/4" (32) phillips trusshead screws.
- Polyurethane foam gasket around edge of frame is standard.
- The standard finish is electrocoat acrylic baked enamel. Other finishes available on request.
- The standard color is #11 Bright White. Other colors are available on request.
- Front blades can be aligned either horizontally or vertically, and are individually adjustable.
- Center mullion is used for blade lengths exceeding 24" (610) nominal size in either dimension on steel models RSDB and RTDB.
- Standard sizing is in even inch increments in both dimensions. Odd inch and fractional sizing [in 1/8" (3) increments] is available on request.
- Center mullion is used for blade lengths exceeding 18" (457) nominal size on aluminum Models RADB, RWDB and RNDB.
- This product is covered by U. S. Patent #5,771,647.
- Steel damper is Model RXEA opposed blade damper.
- Aluminum damper is RXDA opposed blade damper.
- The standard operator on the damper takes a medium size flat-blade screwdriver.
- Maximum size shown is the maximum single panel size. Panels can be joined for larger sizes.
- Metric dimensions are given in millimeters.

Model	Construction	Damper	Front Blade Alignment	Minimum W x H	Maximum W x H
RSDBH	Steel	None	Horizontal	4" x 4" (102 x 102)	36" x 36" (914 x 914)
RSDBV	Steel	None	Vertical		
RTDBH	Steel	Steel	Horizontal		
RTDBV	Steel	Steel	Vertical		
RADBH	Aluminum	None	Horizontal		
RADBV	Aluminum	None	Vertical		
RWDBH	Aluminum	Steel	Horizontal		
RWDBV	Aluminum	Steel	Vertical		
RNDBH	Aluminum	Aluminum	Horizontal		
RNDBV	Aluminum	Aluminum	Vertical		